




# FINESSE

The FINESSE electric radiator provides all the benefits of central heating without the need for a plumbed in system, so it is perfect for projects that are off-gas or have no central heating pipes in the required space. It comes with a sleek, modern control panel and a precision electronic thermostat with frost protection, providing maximum control and minimum energy consumption. It is manufactured in the UK and has a class 1 electrical protection rating.



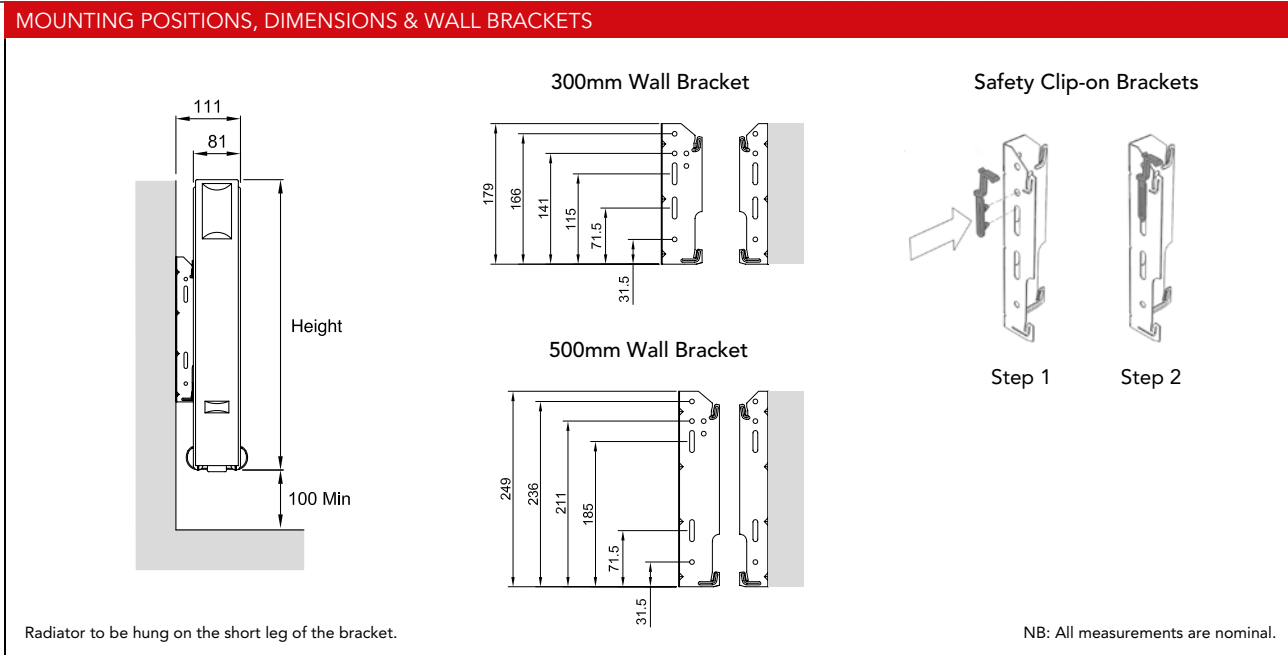

**GENERAL SPECIFICATION**

**CERTIFICATION**  
 Conforms to the standards EN 60 335-1 and EN 60 335-2-30. Produced under a quality management system - ISO 9001:2008 and environmental management system - ISO 14001:2015.

**2 GUARANTEE**  
 2 year guarantee from date of purchase against manufacturing defects.

**COLOUR**  
 Finished in white (RAL 9016).

**MATERIAL**  
 Manufactured from steel and filled with environmentally friendly vegetable oil.

**A ACCESSORIES**  
 TOUCH4 - 4 zone touch screen programmer. Please see page 245.

**SEALED ELECTRIC**

**IP RATING**  
 IP44.

**DELIVERY**  
 2 - 5 working days.

**WASTE DISPOSAL**  
 According to The WEEE Directive (2012/19/EU). Please see page 251.

For more general information, please see page 250.

TECHNICAL CHARACTERISTICS	
Measured temperature precision	0.1°C
Operating temperature	-10°C + 50°C
Setting temperature range	+5°C + 30°C
Control characteristics	PWM
Electrical protection	Class 1 – IP44
Power supply	230 VAC – 50 Hz
Controls consumption	~3.5 W
The thermostat has been designed to comply with the following Directives and Standards:	<ul style="list-style-type: none"> <li>• EN 60730-01</li> <li>• EN 61000-6-1</li> <li>• EN 61000-6-3</li> <li>• EN 61000-4-2</li> <li>• LV Directive 2006/95/CE</li> <li>• EMC Directive 2004/108/CE</li> </ul>

ACCESSORIES	
Product	Order Code
TOUCH4* - 4 Zone, Touch Screen Programmer (hard wired)	TOUCH4 - refer to page 245

\*Please refer to our website for wiring diagram.



TOUCH4\*

Order Code	Nominal Height (mm)	Nominal Length (mm)	Weight (packed - kg)	Rated Watts
FE30DX50	300	500	10.5	500
FE30DX80	300	800	16.5	750
FE30DX100	300	1000	20.5	1000
FE30DX130	300	1300	25.5	1250
FE30DX160	300	1600	31.5	1500
FE30DX200	300	2000	38.5	2000
FE50DX40	500	400	14.0	500
FE50DX50	500	500	17.0	750
FE50DX65	500	650	21.5	1000
FE50DX80	500	800	25.5	1250
FE50DX95	500	950	29.5	1500
FE50DX125	500	1250	39.1	2000