




FERLO

FERLO is a beautiful, high-quality curved towel rail that will add a luxurious finish to any bathroom. With a choice of a white or chrome finish, a wide range of sizes and a classic design, the FERLO makes a great choice for any project.



DIMENSIONS

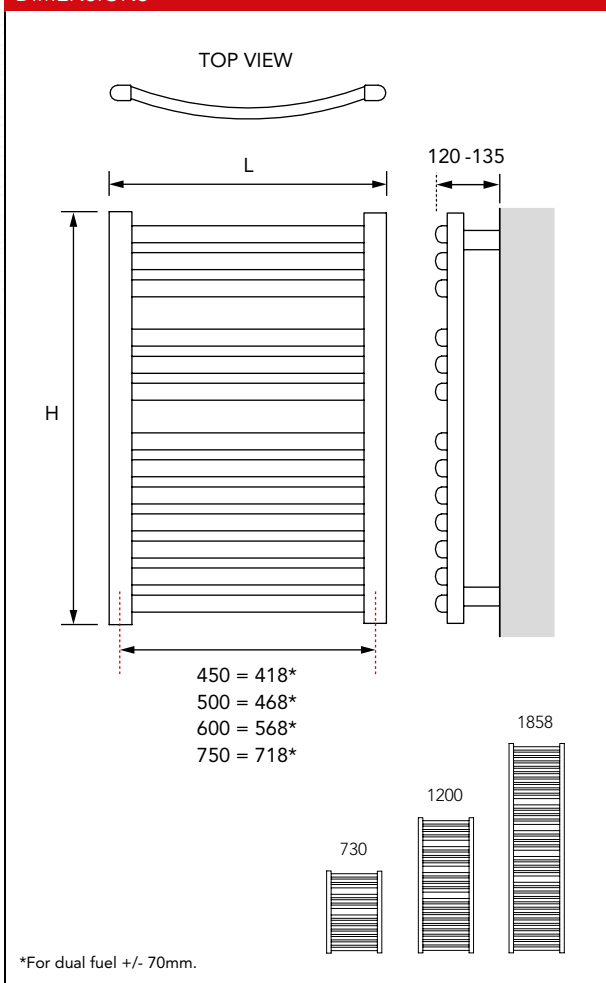

GENERAL SPECIFICATION

- CERTIFICATION**
Manufactured and tested to BS EN 442. Carries the BS Kitemark. Produced under an environmental management system - ISO 14001:2004.
- CONNECTIONS**
2 x 1/2" BSP as standard.
- AIR VENTS**
Integrated.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- OPERATING PRESSURES**
Tested to a pressure of 9.6 bar (white) 6.9 bar (chrome). Working pressure of up to 7.4 bar (white) 5.3 bar (chrome).
- COLOUR**
Finished in white (RAL 9016) or chrome.
- DUAL FUEL**
MHK dual fuel heater kit options available. Please see table below or page 124 for more information.
- MATERIAL**
White product manufactured from steel. Chrome product manufactured from brass.
- APM® TECHNOLOGY**
MHK heater kit comes with APM® technology. Please see page 251.
- ACCESSORIES**
Please see page 125.
- SYSTEM (INDIRECT)**
2 pipe pumped indirect domestic and commercial heating applications.
- DELIVERY**
Non-stocked item: 8 - 12 weeks.
- SYSTEM (DIRECT)**
Chrome model suitable for most direct central heating or hot water systems. Please refer to page 251 for information on dezincification.
- VALVES**
Please see page 124.

WEIGHTS & n-COEFFICIENTS

Model	Weight (kg)	n-Coefficient	
		White	Chrome
CMR1/45	8.40	1.248	1.255
CMR1	10.20	1.248	1.255
CMR2	10.20	1.248	1.255
CMR3	14.30	1.248	1.255
CMR4/45	15.70	1.233	1.328
CMR4	17.00	1.233	1.328
CMR5	20.40	1.233	1.328
CMR6	24.00	1.233	1.328
CMR7/45	25.20	1.232	1.273
CMR7	27.50	1.232	1.273
CMR8	32.20	1.232	1.273
CMR9	39.00	1.232	1.273

For more general information, please see page 250.

DUAL FUEL HEATER KITS

Model	Suitable for White Rail	Suitable for Chrome Rail
	Code	Code
CMR1/45 to CMR6	MHK300	MHK200
CMR7/45 to CMR9	MHK500	MHK500

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C				Heat Outputs @ ΔT 30°C				Dual Fuel Rating	
			Watts		Btu/h		Watts		Btu/h		Watts	
			White	Chrome	White	Chrome	White	Chrome	White	Chrome	White	Chrome
CMR1/45	730	440	297	195	1015	666	157	103	536	351	300	200
CMR1	730	490	331	217	1128	740	175	114	597	389	300	200
CMR2	730	590	397	260	1353	888	210	137	717	467	300	200
CMR3	730	740	496	326	1691	1111	262	171	894	583	300	200
CMR4/45	1200	440	493	322	1681	1098	250	163	853	556	300	200
CMR4	1200	490	548	358	1868	1220	278	181	949	618	300	200
CMR5	1200	590	657	429	2242	1464	333	218	1136	744	300	200
CMR6	1200	740	821	536	2802	1830	417	272	1423	928	300	200
CMR7/45	1858	440	755	491	2575	1674	394	256	1344	873	500	500
CMR7	1858	490	839	545	2861	1860	438	284	1494	969	500	500
CMR8	1858	590	1006	654	3433	2231	525	341	1791	1163	500	500
CMR9	1858	740	1258	818	4291	2789	656	427	2238	1457	500	500