

MYSON has a range of contemporary towel warmers that will add style, vibrancy and a bit of a wow factor to your bathroom. Our products have been expertly designed to look great, as well as serve as highly functional heat emitters. Our range is extremely diverse, from intricate masterpieces to stunningly simple designs, we're confident there is something for everyone. Most of our products come in a choice of finish, and several ranges are available in selected RAL colours, special textured, metallic and shimmer metallic finishes.

- Our contemporary collection is so versatile there is something to suit any bathroom
- Products like TOPAZ, FATALA and KASAI can be used as bathroom radiators to warm towels or to add style to a living room or bedroom
- We also have a range of contemporary electric towel warmers, see pages 210 - 215 for details



# CONTEMPORARY TOWEL WARMERS





NEW!

TOPAZ


The new double TOPAZ bathroom radiator from MYSON provides excellent heat output, thanks to its generous tubular water channels. It is the perfect specification towel radiator for low temperature heating systems. TOPAZ is available in a wide choice of sizes, finished in White, Anthracite, Silver or Matt Black. The contemporary and practical range will add style, vibrancy and a bit of wow to any bathroom.

Choose from a range of decorative valves to complement TOPAZ.



RAL 7016  
Anthracite

Dimensions

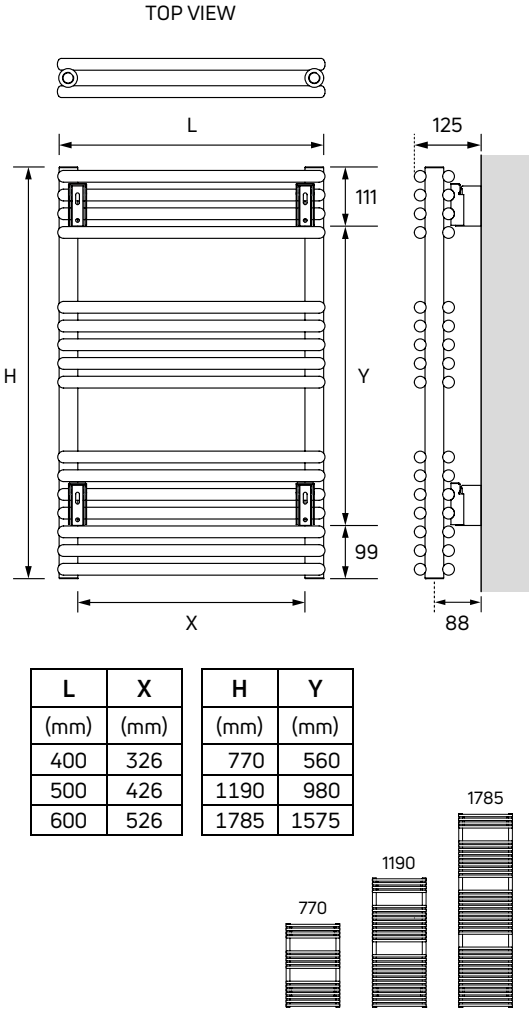

Weights, water contents & n-coefficients

Model (H/L)	Weight (kg)	Water Content (l)	n-Coefficient
770/400	14.00	5.10	1.2431
770/500	15.64	6.32	1.2344
770/600	18.24	7.53	1.2257
1190/400	21.00	7.55	1.2511
1190/500	23.56	8.99	1.2413
1190/600	27.48	10.44	1.2315
1785/400	29.80	11.60	1.2829
1785/500	35.83	15.57	1.2696
1785/600	41.86	19.54	1.2563

Technical information & heat outputs


Order Code (Type - Double)				Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
White	Anthracite	Matt Black	Silver			Watts	Btu/h	Watts	Btu/h
TPZD770400	TPZD7704007016	TPZD7704009005	TPZD770400SILV	770	400	524	1788	278	949
TPZD770500	TPZD7705007016	TPZD7705009005	TPZD770500SILV	770	500	644	2197	343	1170
TPZD770600	TPZD7706007016	TPZD7706009005	TPZD770600SILV	770	600	765	2610	409	1396
TPZD1190400	TPZD11904007016	TPZD11904009005	TPZD1190400SILV	1190	400	739	2521	390	1331
TPZD1190500	TPZD11905007016	TPZD11905009005	TPZD1190500SILV	1190	500	906	3091	481	1641
TPZD1190600	TPZD11906007016	TPZD11906009005	TPZD1190600SILV	1190	600	1070	3651	570	1945
TPZD1785400	TPZD17854007016	TPZD17854009005	TPZD1785400SILV	1785	400	1086	3705	564	1925
TPZD1785500	TPZD17855007016	TPZD17855009005	TPZD1785500SILV	1785	500	1332	4545	696	2375
TPZD1785600	TPZD17856007016	TPZD17856009005	TPZD1785600SILV	1785	600	1574	5370	828	2825


General specification

- CERTIFICATION**  
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- CONNECTIONS**  
2 x 1/2" BSP as standard.
- AIR VENTS**  
Integrated, bottom-opposite-end connection.
- OPERATING PRESSURES**  
Tested to a pressure of 5.4 bar. Working pressure of up to 4 bar.
- OPERATING TEMPERATURE**  
Maximum hot water temperature 100°C.
- DELIVERY**  
Non-stocked item: 4 - 6 weeks.
- GUARANTEE**  
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**  
Available in White (RAL 9016), Anthracite (RAL 7016), Matt Black (RAL 9005) or Silver. Other colours available to order.
- MATERIAL**  
Manufactured from steel.
- SYSTEM**  
2 pipe pumped indirect domestic and commercial heating applications.

For more general information, please see page 256.


Made to order colours

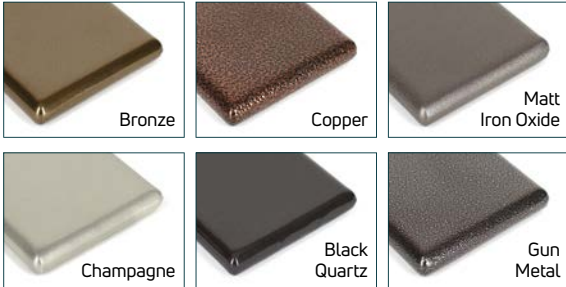




# FATALA


Introduce contemporary elegance into your home with FATALA. Its attractive yet simple asymmetric design is both stylish and practical and will add a fresh modern look to a bathroom or living room. It's available in white or your choice of RAL colour as well as our special textured, metallic or shimmer metallic finishes.

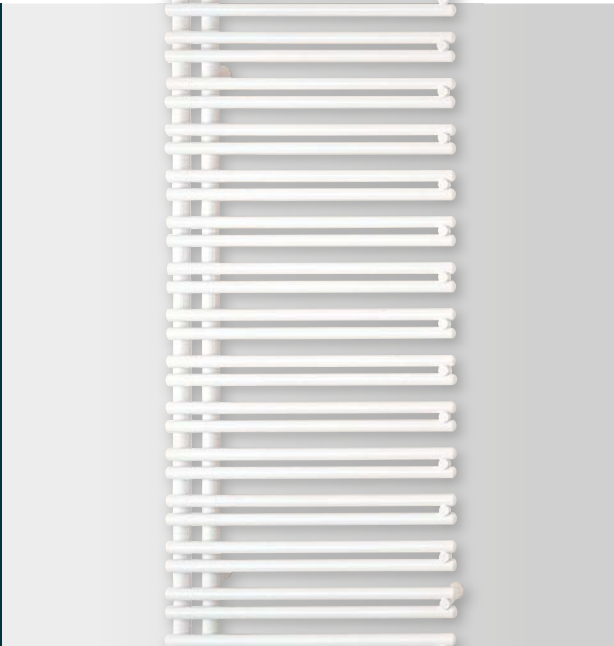





# INTERLUDE


INTERLUDE is a simple and elegant flat tube radiator. It is manufactured from quality steel and has a sleek and streamlined appearance. It is both practical and attractive and is available in selected RAL, metallic or special metallic finishes.





General specification


- 


**CERTIFICATION**  
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- 


**ACCESSORIES**  
Please see page 138.
- 


**SYSTEM**  
2 pipe pumped indirect domestic and commercial heating applications.
- 

**CONNECTIONS**  
2 x ½" BSP as standard.
- 

**AIR VENTS**  
Included in the packaging.
- 


**OPERATING PRESSURES**  
Tested to a pressure of 13 bar. Working pressure of up to 10 bar.
- 

**COLOUR**  
Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 258.
- 

**MATERIAL**  
Manufactured from steel.
- 

**DELIVERY**  
Non-stocked item: 4 - 6 weeks.

For more general information, please see page 256.

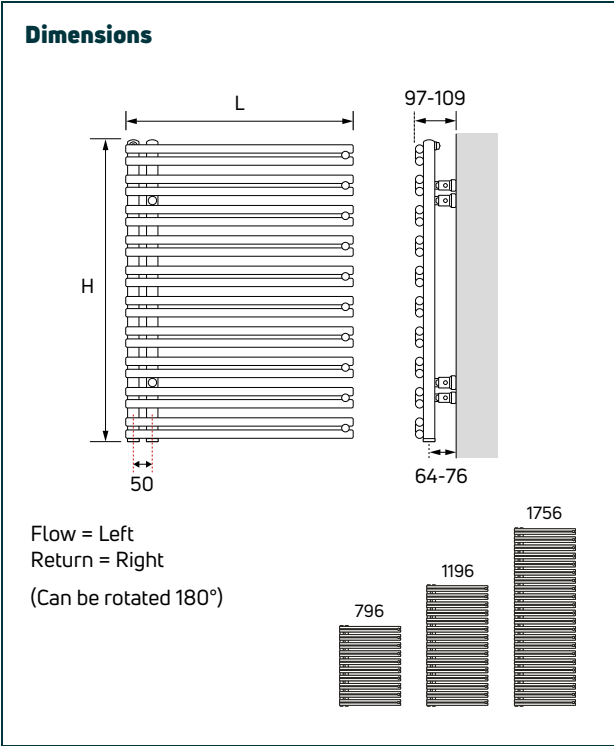


Weights, water contents & n-coefficients


Model	Weight (kg)	Water Content (l)	n-Coefficient
MAE1	8.90	3.80	1.189
MAE2	13.30	5.90	1.202
MAE3	19.50	8.00	1.241


Technical information & heat outputs


Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
MAE1	796	500	446	1522	243	829
MAE2	1196	500	650	2218	352	1201
MAE3	1756	500	897	3061	476	1624


General specification


- 


**CERTIFICATION**  
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- 


**CONNECTIONS**  
2 x ½" BSP as standard.
- 


**AIR VENTS**  
Included in the packaging.
- 

**OPERATING PRESSURES**  
Tested to a pressure of 5.2 bar. Working pressure of up to 4 bar.
- 


**DUAL FUEL**  
ECO450 dual fuel heater kit available for INT2 & INT3 only. Please see page 138.
- 

**DELIVERY**  
Stocked items (white/RAL 9006): 2 - 5 working days. Non-stocked items (colour): 4 - 6 weeks.
- 

**COLOUR**  
Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 258.
- 

**MATERIAL**  
Manufactured from steel.
- 

**SYSTEM**  
2 pipe pumped indirect domestic and commercial heating applications.
- For more general information, please see page 256.
- Dimensions**

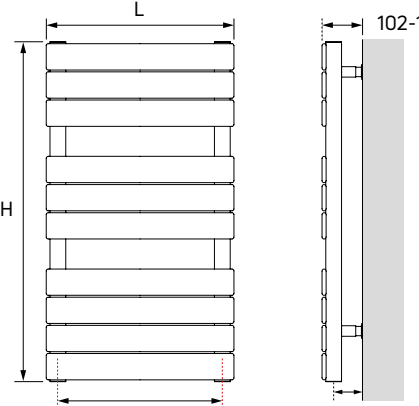

\*For dual fuel +/- 70mm.
- Weights, water contents & n-coefficients
- | Model | Weight (kg) | Water Content (l) | n-Coefficient |
|-------|-------------|-------------------|---------------|
| INT1  | 9.31        | 2.9               | 1.190         |
| INT2  | 13.68       | 4.8               | 1.205         |
| INT3  | 19.86       | 8.6               | 1.227         |
- Technical information & heat outputs
- | Order Code | Nominal Height (H) (mm) | Nominal Length (L) (mm) | Heat Outputs @ ΔT 50°C |       | Heat Outputs @ ΔT 30°C |       | Dual Fuel Rating |
|------------|-------------------------|-------------------------|------------------------|-------|------------------------|-------|------------------|
|            |                         |                         | Watts                  | Btu/h | Watts                  | Btu/h |                  |
| INT1       | 530                     | 500                     | 295                    | 1007  | 161                    | 549   | -                |
| INT2       | 905                     | 500                     | 470                    | 1604  | 254                    | 867   | 450              |
| INT3       | 1655                    | 500                     | 817                    | 2788  | 435                    | 1484  | 450              |
- 106 | Complete Heating Solutions 2023 (Sept23 edition)
- Complete Heating Solutions 2023 (Sept23 edition) | 107






# KASAI

A striking and highly individual round tube radiator, KASAI demands to be noticed. It is a versatile choice and will make a strong addition to a bathroom or living space. It is available in selected RAL or metallic colour finishes to ensure that, whatever your décor, the KASAI will enhance your home.



RAL 9006  
White Aluminium

### Dimensions

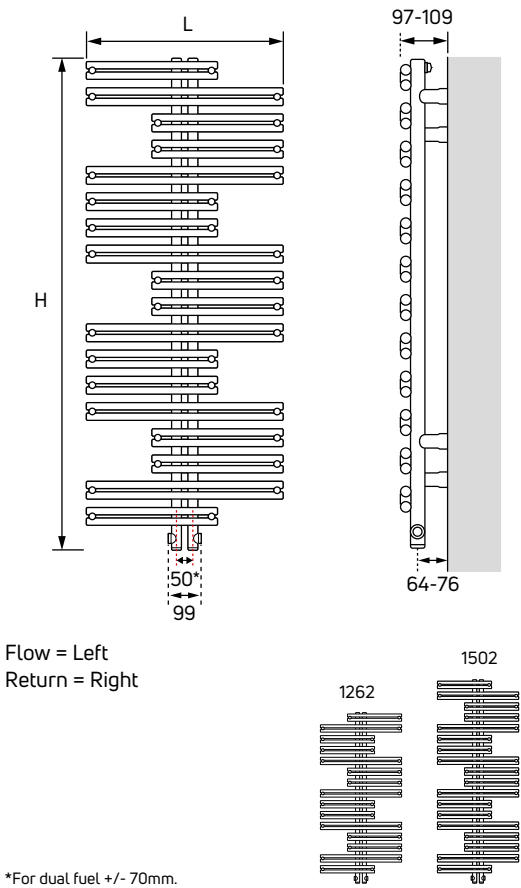

RAL 9016  
Traffic White

### Weights, water contents & n-coefficients

Model	Weight (kg)	Water Content (l)	n-Coefficient
CAP1	13.30	5.30	1.253
CAP2	16.00	6.10	1.247

### General specification

- CERTIFICATION**  
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- GUARANTEE**  
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**  
Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 258.
- MATERIAL**  
Manufactured from steel.
- ACCESSORIES**  
Please see page 138.
- SYSTEM**  
2 pipe pumped indirect domestic and commercial heating applications.

- CONNECTIONS**  
4 x 1/2" BSP as standard - side or bottom connection possibilities.
- AIR VENTS**  
Included in the packaging.
- OPERATING PRESSURES**  
Tested to a pressure of 13 bar.  
Working pressure of up to 10 bar.
- DUAL FUEL**  
ECO450 dual fuel heater kit available. Please see page 138.
- DELIVERY**  
Non-stocked item: 4 - 6 weeks.

For more general information, please see page 256.

### Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
CAP1	1262	600	613	2092	323	1102	450
CAP2	1502	600	724	2470	383	1307	450




# MARANOA

MARANOA has an attractive asymmetric design that uses blocks and spaces to create a distinctive appearance. The large flat tubes are both stylish and practical and, with left or right hand mounting options, it offers flexibility in any project. MARANOA is available in selected RAL, metallic or special metallic finishes.



RAL 9006  
White Aluminium

## Dimensions

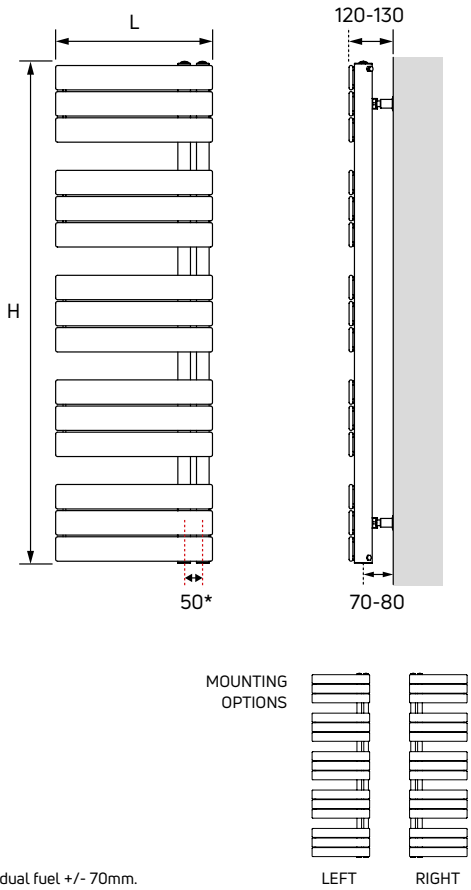

\*For dual fuel +/- 70mm.



RAL 9016  
Traffic White

## Weights, water contents & n-coefficients

Model	Weight (kg)	Water Content (l)	n-Coefficient
CH02	21.28	8.5	1.272

## General specification

- CERTIFICATION**  
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- GUARANTEE**  
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**  
Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 258.
- MATERIAL**  
Manufactured from steel.
- SYSTEM**  
2 pipe pumped indirect domestic and commercial heating applications.

- CONNECTIONS**  
2 x 1/2" BSP as standard.
- AIR VENTS**  
Integrated.
- OPERATING PRESSURES**  
Tested to a pressure of 5.2 bar. Working pressure of up to 4 bar.
- DUAL FUEL**  
ECO450 dual fuel heater kit available. Please see page 138.
- DELIVERY**  
Non-stocked item: 4 - 6 weeks.

For more general information, please see page 256.

## Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
CH02	1430	600	855	2917	446	1522	450






# MERSEY


MERSEY is an extremely functional radiator. It combines all the advantages of a PREMIER HE radiator and towel warmer for a truly practical design. It is manufactured from high quality brass with an attractive polished chrome plated finish. MERSEY is ideal for use not just in bathrooms but also kitchens, cloakrooms and other small areas.














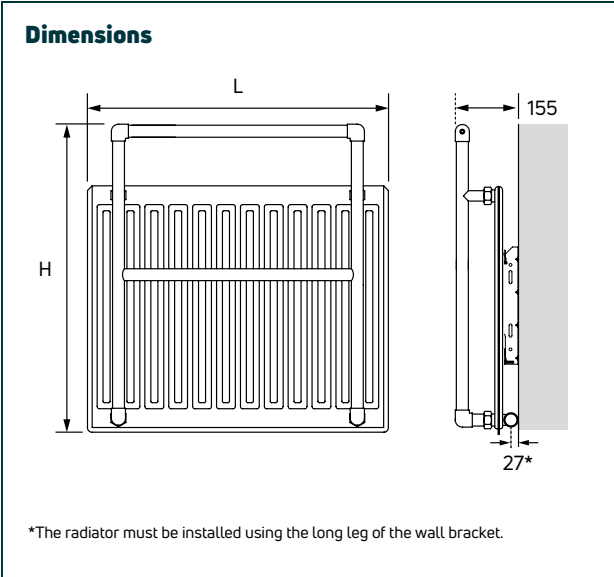
# OUSE

OUSE is a highly practical combination radiator. At its centre is a PREMIER HE radiator that produces high heat outputs. This is surrounded by a functional round tube frame that is manufactured from high quality brass and has an attractive polished chrome plated finish.



General specification

- **CERTIFICATION**  
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- **SYSTEM**  
2 pipe pumped indirect domestic and commercial heating applications.
- **CONNECTIONS**  
2 x ½" BSP as standard.
- **AIR VENTS**  
Integrated.
- **OPERATING PRESSURES**  
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- **DELIVERY**  
2 - 5 working days.
- **GUARANTEE**  
10 year guarantee from date of purchase against manufacturing defects.
- **COLOUR**  
Frame finished in chrome. Radiator in white (RAL 9016).
- **MATERIAL**  
Frame manufactured from brass. Radiator manufactured from steel.



For more general information, please see page 256.

Weights











Model	Weight (kg)
MTR2	11.10
MTR4	15.10


Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
MTR2	655	640	385*	1314*	208*	709*
MTR4	809	745	564*	1924*	295*	1007*

\*Outputs NPD, see page 257.

General specification

- **CERTIFICATION**  
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- **ACCESSORIES**  
Sleeving kit available. Please see page 138.
- **SYSTEM**  
2 pipe pumped indirect domestic and commercial heating applications.
- **CONNECTIONS**  
2 x ½" BSP as standard.
- **AIR VENTS**  
Integrated.
- **OPERATING PRESSURES**  
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- **DELIVERY**  
2 - 5 working days.
- **GUARANTEE**  
10 year guarantee from date of purchase against manufacturing defects.
- **COLOUR**  
Frame finished in chrome. Radiator in white (RAL 9016).
- **MATERIAL**  
Frame manufactured from brass. Radiator manufactured from steel.

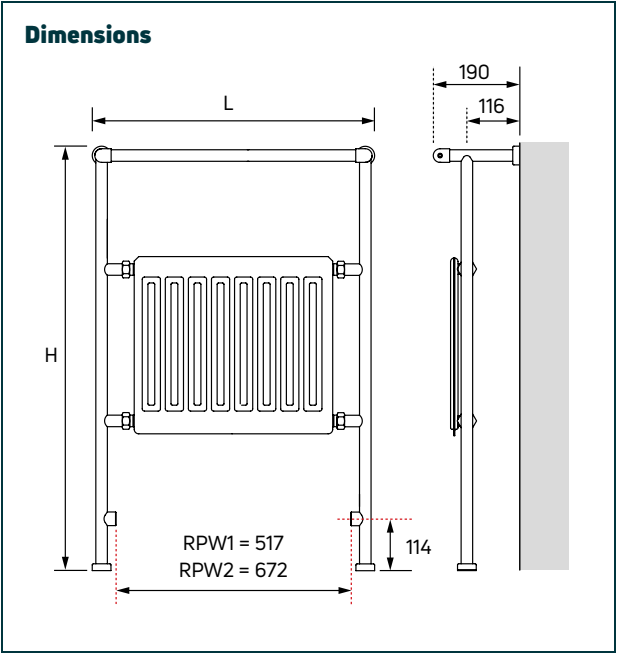

For more general information, please see page 256.

Weights & n-coefficients

Model	Weight (kg)	n-Coefficient
RPW1	10.90	1.212
RPW2	12.40	1.212

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
RPW1	934	622	290	989	156	532
RPW2	934	777	359	1225	193	659

TOWEL WARMERS



SOKOTO

SOKOTO is a stylish and distinctive combination radiator. It is highly practical, with a flat tube DÉCOR radiator at its centre, giving it not only high heat outputs, but an attractive appearance. The outer rail is manufactured from high quality brass with an attractive polished chrome plated finish which gives it a truly modern feel.



TOWEL WARMERS





STOUR


STOUR is a beautifully simple frame and rail design that will look classy and elegant in any bathroom. Its round tubes are manufactured from quality brass with a highly polished chrome finish.





General specification


- 


**CERTIFICATION**  
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- 


**ACCESSORIES**  
Sleeving kit available. Please see page 138.
- 


**SYSTEM**  
2 pipe pumped indirect domestic and commercial heating applications.
- 


**CONNECTIONS**  
2 x 1/2" BSP as standard.
- 

**AIR VENTS**  
Integrated.
- 


**OPERATING PRESSURES**  
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- 

**DELIVERY**  
2 - 5 working days.
- 


**GUARANTEE**  
10 year guarantee from date of purchase against manufacturing defects.
- 


**COLOUR**  
Frame finished in chrome. Radiator in white (RAL 9016).
- 


**MATERIAL**  
Frame manufactured from brass. Radiator manufactured from steel.

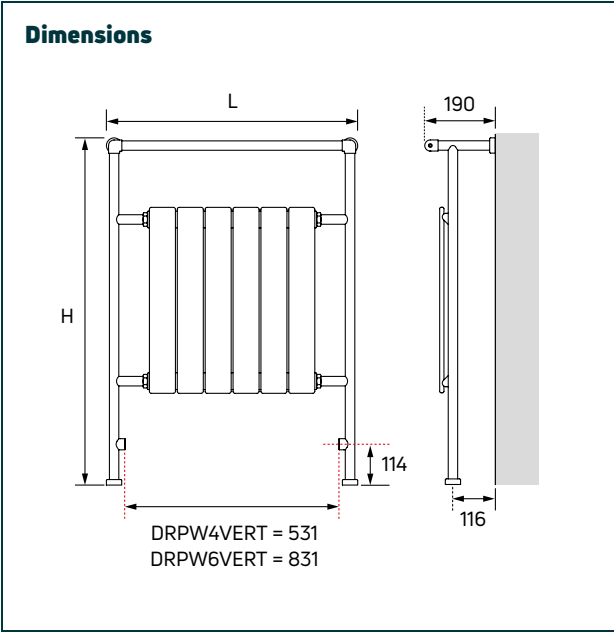



General specification


- 


**CERTIFICATION**  
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- 


**SYSTEM (DIRECT)**  
Suitable for direct systems. Please refer to page 257 for information on dezincification.
- 


**CONNECTIONS**  
2 x 1/2" BSP as standard.
- 


**AIR VENTS**  
Integrated.
- 


**OPERATING PRESSURES**  
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- 


**DUAL FUEL**  
PTC dual fuel heater kit options available. Please see table below or page 138.
- 

**APM\* TECHNOLOGY**  
PTC heater kit comes with APM\* technology. Please see page 257.
- 


**DELIVERY**  
2 - 5 working days.
- 

**GUARANTEE**  
10 year guarantee from date of purchase against manufacturing defects.
- 

**COLOUR**  
Finished in chrome.
- 

**MATERIAL**  
Manufactured from brass.
- 

**SYSTEM (INDIRECT)**  
2 pipe pumped indirect domestic and commercial heating applications.

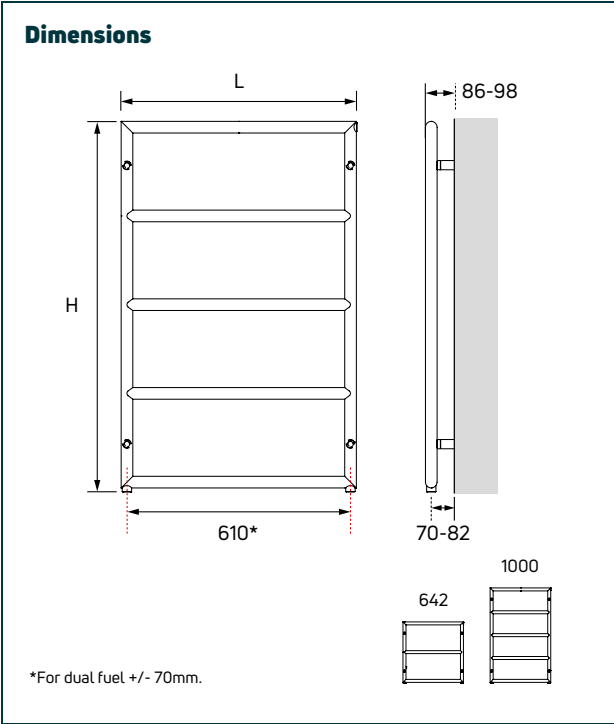

For more general information, please see page 256.

Dual fuel heater kits

Model	Dual Fuel Order Code
BEA1	PTC75
BEA6	PTC150

Weights

Model	Weight (kg)
BEA1	5.20
BEA6	7.60

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
BEA1	642	642	193*	659*	104*	356*	75
BEA6	1000	642	274*	935*	148*	505*	150

\*Outputs NPD, see page 257.

For more general information, please see page 256.

Weights & n-coefficients

Model	Weight (kg)	n-Coefficient
DRPW4VERT	13.70	1.224
DRPW6VERT	18.80	1.224

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
DRPW4VERT	934	636	387	1320	207	706
DRPW6VERT	934	936	559	1907	299	1020