



TRV 2-WAY

Our TRV 2-WAY is A-rated for maximum efficiency. The MYSON TRV 2-WAY is the most complete thermostatic radiator valve range available for today's central heating systems.



2TRV15C



2TRV15N

Incorporating our unique '2-way' engineering, including our patented 'bonding' technique, the MYSON TRV 2-WAY simplifies installation and removes the worry of costly callbacks. It has a liquid sensor fitted at its heart, guaranteeing years of accurate temperature control. It is available in a polished chrome, nickel or brass finish. An impaired dexterity version is also available, for applications where this is required.

FOR RADIATOR VALVE PACKS

Please see page 242

General specification



CERTIFICATION
Produced under a quality management system - ISO 9001:2008. Conforms to BS 2767-10 and complies to EN 215.



OPERATING PRESSURES
Tested to a maximum pressure of 10 bar (compression), 3 bar (pushfit).



GUARANTEE
2 year guarantee from date of purchase against manufacturing defects.



OPERATING TEMPERATURE
Maximum 120°C (compression), 92°C (pushfit).



COLOUR
Finished in chrome, nickel or brass.



DELIVERY
2 - 5 working days.




CONNECTIONS
Compression or pushfit.

For more general information, please see page 260.

Dimensions


Angle TRV 2-WAY (Includes Pushfit)

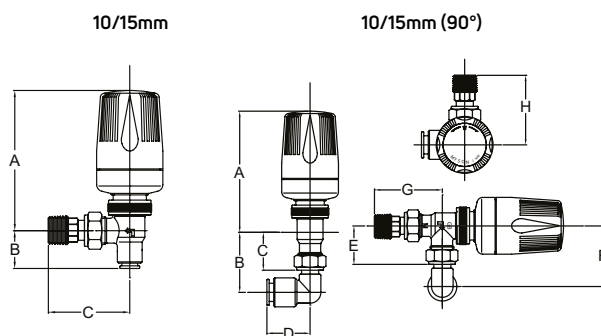


Model	A	B	C	D	E	F	G	H
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
10/15mm Chrome/Nickel	107.0	39.0	61.0	-	-	-	-	-
10mm Chrome/Nickel PF	107.0	33.0	61.0	-	-	-	-	-
15mm Chrome/Nickel PF	107.0	33.0	61.0	-	-	-	-	-
10mm (90°) Nickel PF	107.0	47.0	33.0	30.0	34.0	50.0	60.0	61.0
10mm (90°) Chrome PF	107.0	47.0	33.0	30.0	34.0	50.0	60.0	61.0
15mm (90°) Nickel PF	107.0	53.0	33.0	38.0	34.0	56.0	60.0	61.0
15mm (90°) Chrome PF	107.0	53.0	33.0	38.0	34.0	56.0	60.0	61.0
10mm (90°) Chrome Compression	107.0	47.0	33.0	31.0	34.0	50.0	60.0	61.0

NB: All measurements are nominal.

Straight TRV 2-WAY (Includes Pushfit)

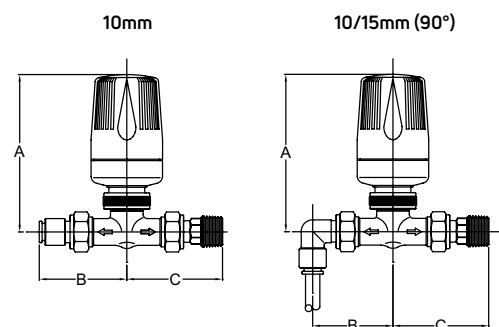

Model	A	B	C
	(mm)	(mm)	(mm)
10mm Chrome PF	110.0	61.0	67.0
10mm (90°) Chrome PF	110.0	56.0	67.0
15mm (90°) Chrome PF	110.0	62.0	67.0

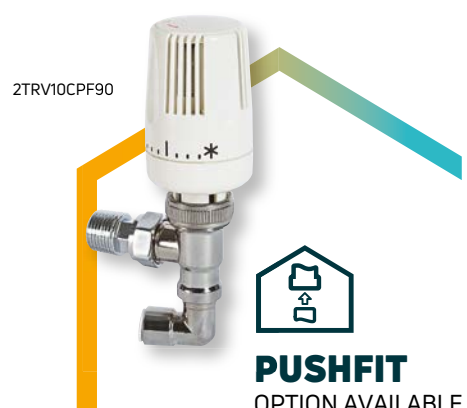

TRV 2-WAY

Description	Metal Finish	Order Code	Minimum Order Qty
10/15mm Angle	Chrome	2TRV10C	1
15mm Angle	Chrome	2TRV15C	1
15mm Straight	Chrome	2TRV15SC	1
10/15mm Angle	Brass	2TRV10B	1
15mm Angle	Brass	2TRV15B	1

TRV 2-WAY contract

8/10/15mm Angle	Nickel	2TRVUS	1
10/15mm Angle	Nickel	2TRV10N	1
10/15mm Straight	Nickel	2TRV10NS	1
15mm Angle	Nickel	2TRV15N	1
10mm (90° Comp Elbow)	Nickel	2TRV10N90	1

TRV 2-WAY pushfit



10mm (90° Pushfit Elbow) Angle	Chrome	2TRV10CPF90	1
10mm (90° Pushfit Elbow) Straight	Chrome	2TRV10SCPF90	1
10mm Straight	Chrome	2TRV10SCPF	1
15mm (90° Pushfit Elbow) Angle	Chrome	2TRV15CPF90	1
15mm Angle	Chrome	2TRV15CPF	1
15mm (90° Pushfit Elbow) Straight	Chrome	2TRV15SCPF90	1

TRV 2-WAY contract pushfit



10mm (90° Pushfit Elbow) Angle	Nickel	2TRV10NPF90	1
10mm Angle	Nickel	2TRV10NPF	1
15mm (90° Pushfit Elbow) Angle	Nickel	2TRV15NPF90	1
15mm Angle	Nickel	2TRV15NPF	1